




FLEX SCREED SVE

Flex screed is the surface vibrator of modular construction, ideal for varying panel widths from 6 meters to 12 meters.

- Standard sections of 1.5 mtrs. & 3 mtrs. length

- Individual sections to be joined together to suit the panel width.
- Individual sections carry eccentric shaft; hence uniform vibrations throughout the vibrator length.
- Option of manual or electric winch.
- Turnbuckle provided to give camber at each joint up to 10 mm.

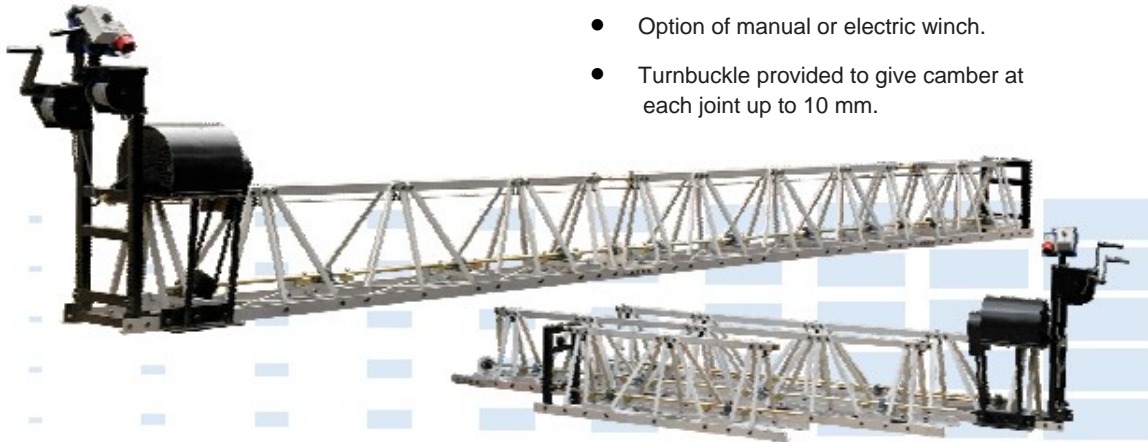

FLEX SCREED SVE TECHNICAL DATA

Electric Motor	- 3 Phase, 415 V., 50 Hz.
Rated Current	- 4.6 A.
Power	- 2.2 kW.
Centrifugal Force	- 500 Nm
Working speed	- 1-1.5 mtr/min.

Dimensions

Beam height	- 490 mm
Beam width	- 350 mm

Working length

3 m. section-	3100 mm
1.5 m. section-	1550 mm
Max. length of the screed -	12 mtr.

Weights

Section 1.5 m	- 25 Kg
Section 3 m	- 50 Kg
Drive unit 3 m	- 90 Kg

