



Finer Machines... Finest Constructions

## Flex Screed SVE


## Fixed Form Paver

## Truss Screed

Flex screed is a surface vibrator of modular construction, ideal for varying panel widths from 5 meters to 12 meters.

- Standard sections of 1, 2 and 3 mtrs. length. Special lengths on request.
- Individual sections to be joined together to suit the panel width.
- Individual sections carry eccentric shaft; hence uniform vibrations throughout the vibrator length.
- Option of manual or electric winch.
- Turnbuckle provided to give camber at each joint up to 10 mm.

Modular Construction

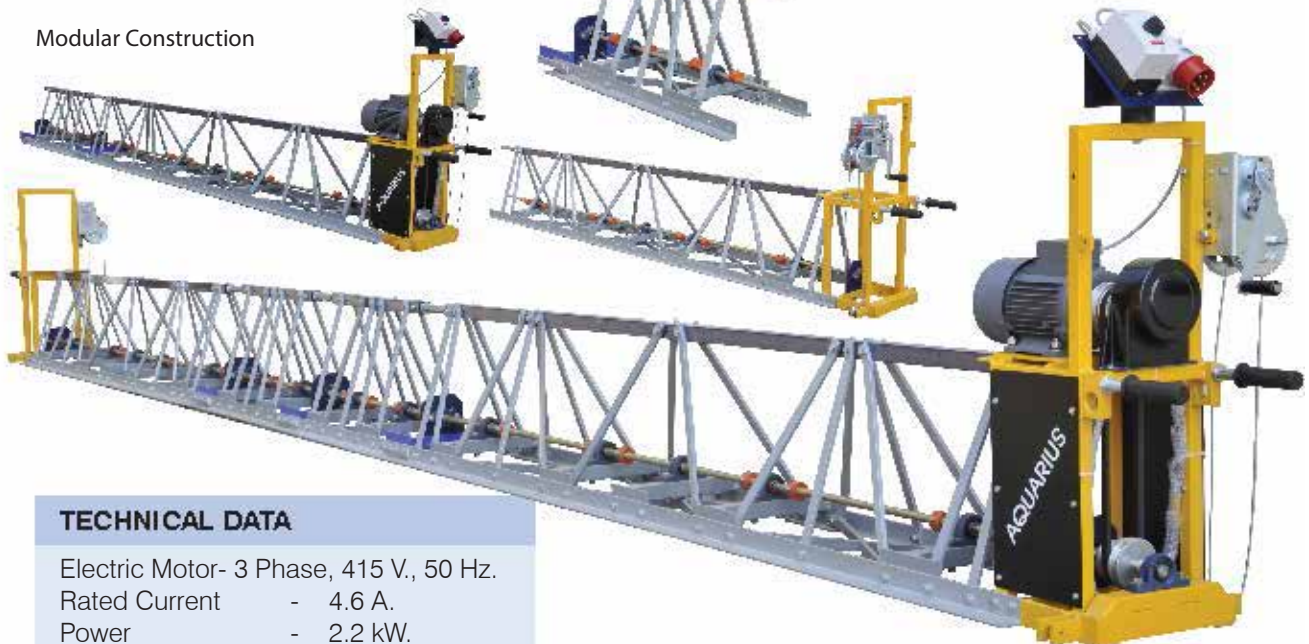

### TECHNICAL DATA

Electric Motor- 3 Phase, 415 V., 50 Hz.  
Rated Current - 4.6 A.  
Power - 2.2 kW.  
Centrifugal Force - 500 Nm  
Working speed - 1-1.5 mtr/min.

### Dimensions


Beam height - 490 mm  
Beam width - 350 mm

### Working length

3 m section - 3000 mm  
2 m section - 2000 mm  
1 m section - 1000 mm  
Drive unit - 325 mm  
End unit - 325 mm  
Max. length of the screed - 12 m

### Weights

3 m section - 40 Kg  
2 m section - 30 Kg  
1 m section - 20 Kg  
Drive unit - 51 Kg  
End unit - 20 Kg

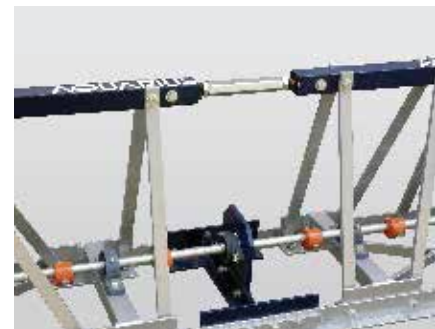

Turn Buckle